



Cam Action Door Closer

DC8825BCD  

Vivid Architectural



Features


- Complies with AS1428.1 2009 design for access and mobility
- Adjustable power size 2~5
- Adjustable closing & latching speed
- Adjustable back check
- Adjustable delay action
- Thermo-constant valve
- Surface mount
- Cam action
- Track arm
- Single-action door
- Non-handed installation

Applications

(specify type when ordering)

- B type: Door mount pull side & transom mount push side
- G type: Door mount push side & transom mount pull side


TYPICAL POWER CURVE

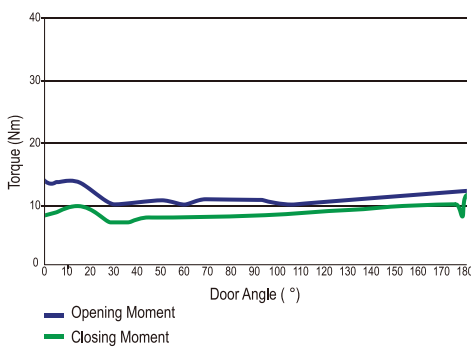

Specifications

Brand	Vivid Architectural
Door Type	Timber or Metal
Door Thickness	32mm – 50mm
Max. Door Width	1250mm
Max. Opening Angle	180°
Fire Rated	2 hour
Power Size	2~5
Finish	Anodized aluminum for door closer body and track rail as standard
Packaging	Box

Dimensions

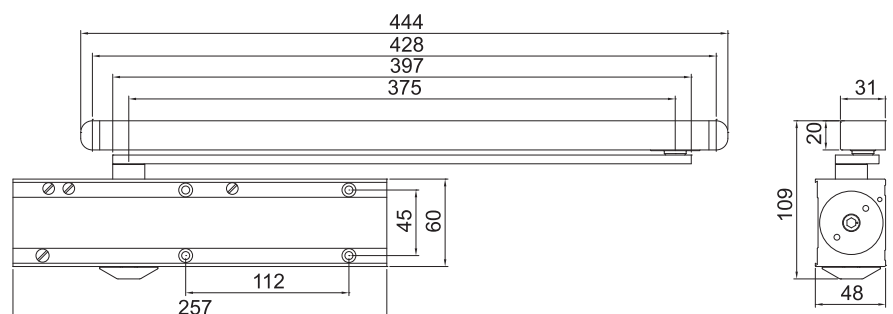



Cam Action Door Closer


DC8825BCD  

Options + Instructions


Installation Instructions



B TYPE

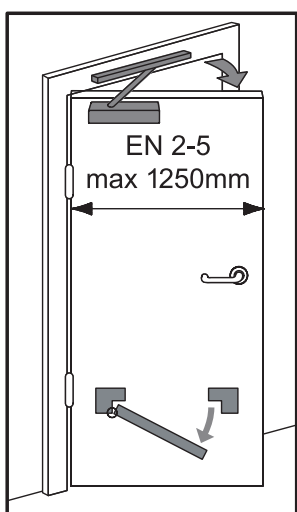


Door mount pull side

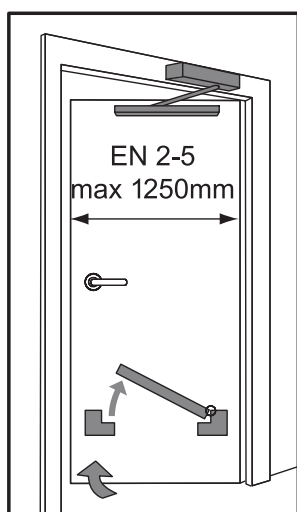


Transom mount push side

G TYPE

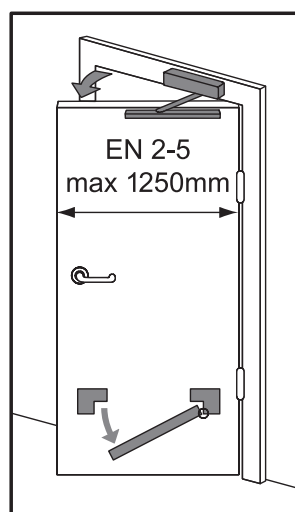


Transom mount pull side

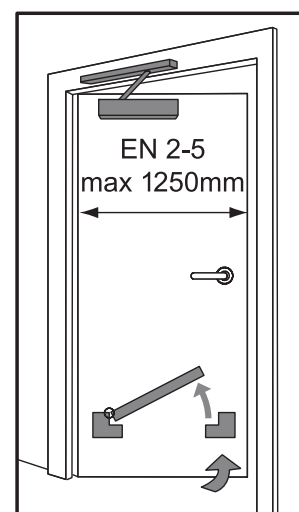


Door mount push side

Options

- 8800STPA
• Angle Bracket
• G Type Push Side

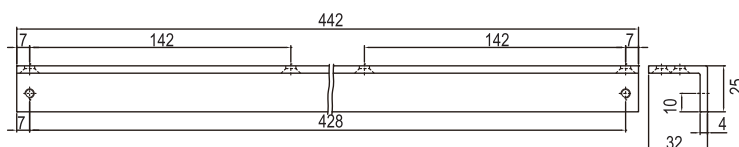

- 8825DP
• Mounting Plate

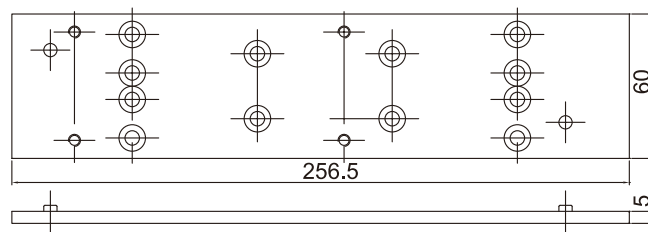

- 8800C
• Metal Cover (Stainless Steel)
• Non-handed

