

VIVID 8000 SERIES

Rack & Pinion Door Closer

VIVID ARCHITECTURAL

DC8024BC



Features


- ▶ Power adjustable EN Size 2~4
- ▶ Rack & Pinion operation
- ▶ Adjustable closing & latching speeds
- ▶ Adjustable backcheck
- ▶ Thermo-constant valve
- ▶ Surface mount
- ▶ Standard arm
- ▶ Single-action door
- ▶ Non-handed installation

Application

- ▶ Standard door mount on pull side
- ▶ Transom mount on push side
- ▶ Parallel bracket mount
- ▶ Max. door width 1100mm
- ▶ Max. door weight 80kg
- ▶ Max. door angle 180°

Certifications

- ▶ Fire tested to AS 1530.4-2014
- ▶ Cycle tested to EN 1154:1996 (500,000 cycles)

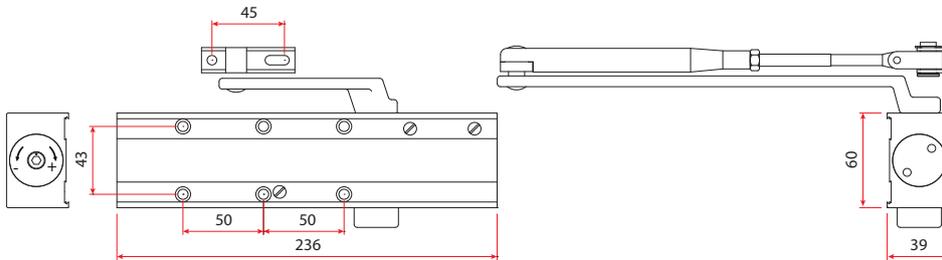

Finishes

- ▶ Painted - Silver & Black as standard.
- ▶ Other finishes P.O.A.

Ordering Codes

- ▶ 8024BC-S (Silver)
- ▶ 8024BC-B (Black)

Accessories

- ▶ 8001HO - Hold Open Arm
- ▶ 8001MP - Mounting Plate
- ▶ 8001DP - Drop Plate
- ▶ 8001ST - Slide Track Arm
- ▶ 8001STHO - Slide Track arm Hold Open Device
- ▶ 8001MC - Metal Cover (Stainless Steel)

