



Surface Mounted Door Closer

DC8024BCS 

Vivid Architectural



Features

- Adjustable power size 2~4
- Adjustable back check
- Closing and latching speed controls
- Parallel arm bracket included
- Suitable for standard, parallel and top jamb mounting
- 2 Hour Fire Rated
- Optional slide track or hold open arm

| STANDARD / TOP JAMB INSTALLATION | | |
|----------------------------------|--------------------------|--------------------------|
| Power Adjustment Size | Internal Door width (mm) | Exterior Door width (mm) |
| 2 | 900 | 800 |
| 3 | 950 | 900 |
| 4 | 1050 | 950 |


| PARALLEL INSTALLATION | | |
|--------------------------|--------------------------|-------------------|
| Internal Door width (mm) | Exterior Door width (mm) | Door Weight (Kgs) |
| 800 | 700 | 25 - 45 |
| 900 | 800 | 40 - 65 |
| 950 | 900 | 60 - 85 |

Specifications

Brand Vivid Architectural
Door Type Timber or Metal
Door Thickness 32mm – 50mm
Max. Door Width Refer table
Door Weight 25kg - 85kg

Max. Opening Angle 180°
Fire Rated 2 hour
Power Size 2~4 adjustable
Finish Silver – Anodised Aluminium
Packaging Box – Vivid Branding

Dimensions

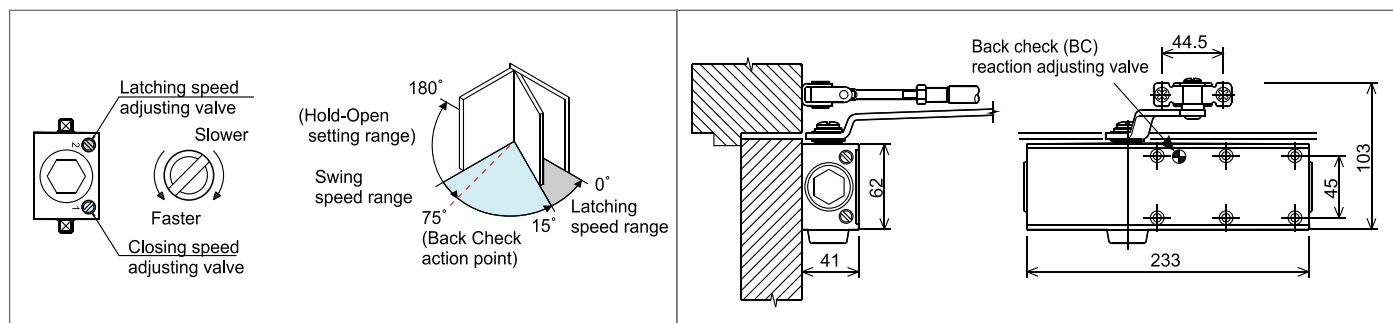






Surface Mounted Door Closer

DC8024BCS 

Options + Instructions

Installation Instructions (for 180° opening)

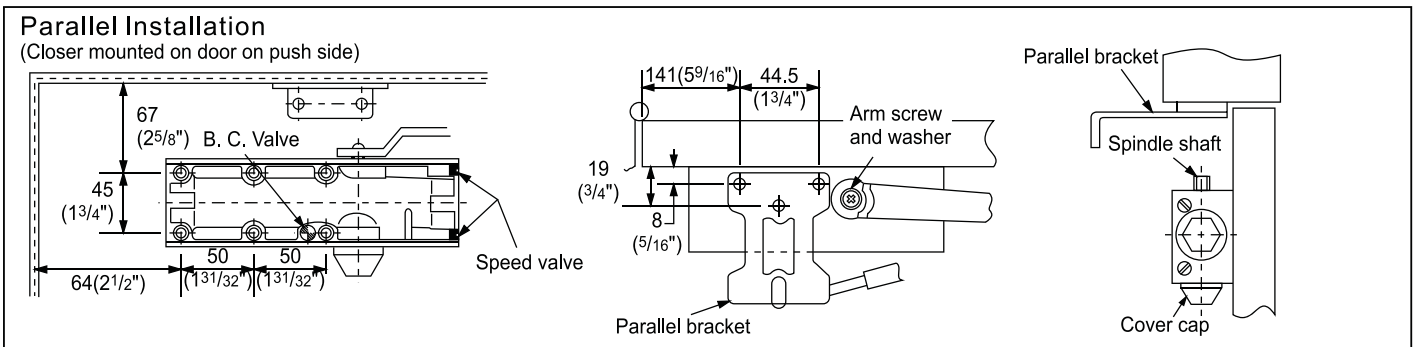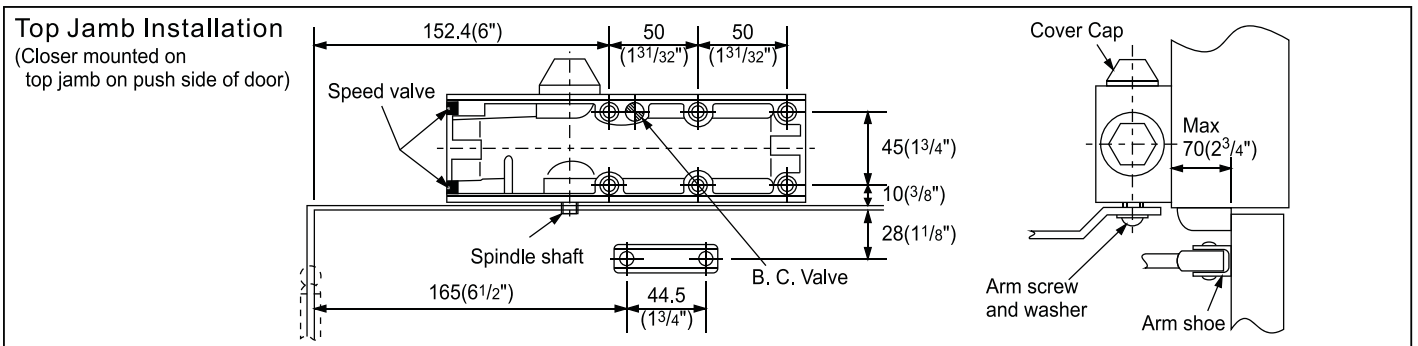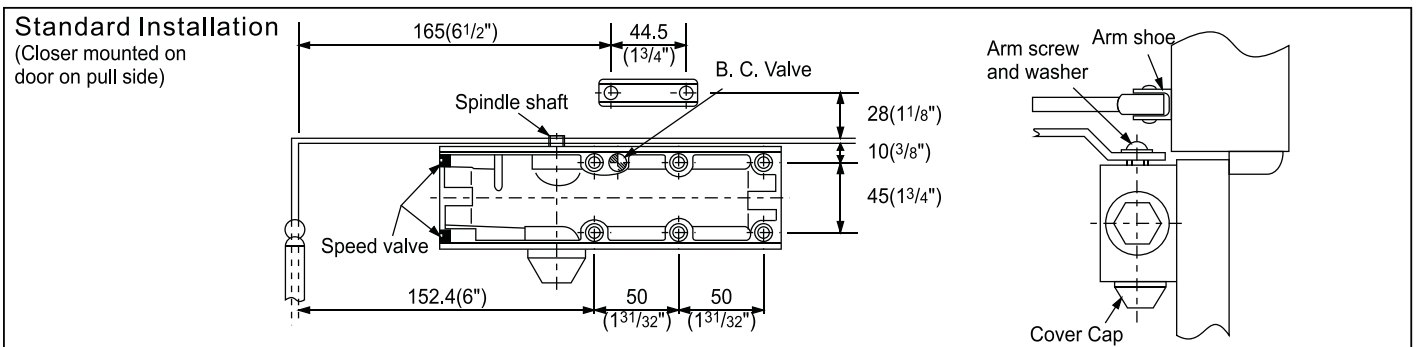

Options



8001ST
SILVER
Slide Track Arm suit 8003/8024 Closer



8001HO
SILVER
Hold Open Arm suit 8003/ 8024 Closer



TNUT16
STAINLESS STEEL
Bolt Through Fixing Pack for Door Closers on Hollow Doors