

# VIVID 8000 SERIES

## Cam Action Door Closer

VIVID ARCHITECTURAL

DC8015CAB/G



### Features

- ▶ Power adjustable EN Size 1~5
- ▶ Adjustable closing & latching speeds
- ▶ Adjustable backcheck
- ▶ Adjustable delayed action
- ▶ Cam action
- ▶ Slide arm
- ▶ Surface mount
- ▶ Single-action door
- ▶ Non-handed installation

### Application

- ▶ B type: Door mount pull side & transom push side
- ▶ G type: Door mount push side & transom pull side
- ▶ Max. door width 1250mm
- ▶ Max. door weight 100kg
- ▶ Max. door angle 180°

### Certifications



- ▶ Fire tested to AS 1530.4-2014
- ▶ Complies with AS 1428:1-2009
- ▶ Cycle tested to EN 1154:1996 (500,000 cycles)

### Finishes


- ▶ Painted - Silver as standard.
- ▶ Other finishes P.O.A.

### Ordering Codes

- ▶ 8015CAB-S (Pull Side Silver)
- ▶ 8015CAG-S (Push Side Silver)

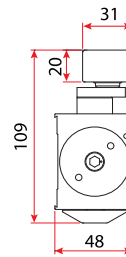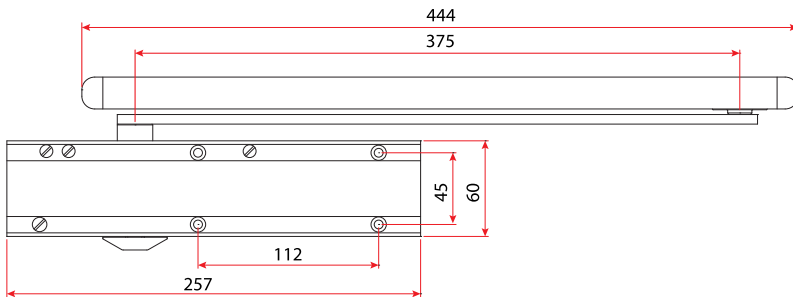

### Power Curve

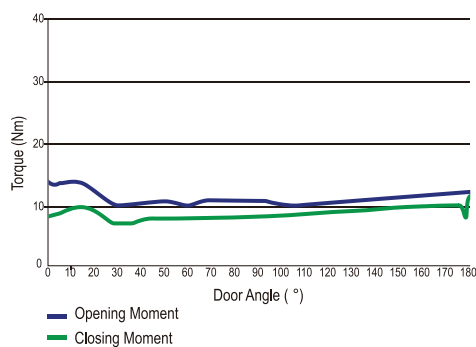

### Accessories

- ▶ 8015HOD - Hold Open Device
- ▶ 8015CLS - Cushion Limiting Stay
- ▶ 8015MP - Mounting Plate
- ▶ 8015AB - Angle Bracket (Slide arm mounting)
- ▶ 8015MC - Metal Cover (Stainless Steel)

